Dealer Sticker

WTR

MAINTENANCE TOOLS



www.wtr-bearingheater.com

WEITERUI

维特瑞

TABLE OF CONTENTS

MOUNTING

Company Profile ---- 1-2
Enterprise Qualification ---- 3-4
Why Use Induction Heater ---- 5-6

ELECTRIC HOT PLATE
WTR-EHP 300 Electrical Hot Plate ---- 7

INSTALLATION TOOLS
WTR-FT 36 Bearing Fitting Tool Kits ---- 8

ELECTRIC HEATER
WTR-T 2.5 Cone Heater ---- 9

INDUCTION HEATERS
WTR-SIH Series ---- 10

INDUCTION HEATERS
WTR-SIH 2.2 ---- 11
WTR-SIH 2.5 ---- 12
WTR-SIH 3.6 ---- 13
WTR-SIH 5.0 ---- 14
WTR-SIH 8.0 ---- 15

INDUCTION HEATERS
WTR-MIH Series ---- 16
WTR-MIH 500 ---- 17
WTR-MIH 1200 ---- 18
WTR-MIH 1600 ---- 19
WTR-BV200-3 ---- 20
WTR-LIH Series ---- 21
WTR-LIH 1600 ---- 22
WTR-LIH 2500 ---- 23
WTR-LIH 3500 ---- 24
WTR-LIH 5000 ---- 25
WTR-LIH 6500 ---- 26
WTR-LIH WP Series ---- 27

APPLICATION
WTR-LIH WP Series ---- 28

TECHNICAL SPECIFICATIONS
Portable Type ---- 29
Movable Type ---- 30
All In One Type(Vertical) & Large Size Type (Horizontal) ---- 31
Large Size Type(Horizontal) ---- 32

MOUNTING&DISMOUNTING

INDUCTION HEATERS
WTR-C Series ---- 33

PRODUCT PARAMETERS
WTR-C Series ---- 34

INDUCTION HEATERS
WTR MF Quick-Heaters ---- 35
WTR MF Heaters -Medium-Frequency ---- 36
WTR-MF5-BE Series ---- 37
WTR-MF Series ---- 38
WTR-MF Series ---- 39

TECHNICAL SPECIFICATIONS
Mounting&Dismounting ---- 40
Mounting&Dismounting ---- 41
Mounting&Dismounting ---- 42
Mounting&Dismounting ---- 43
Flexible Inductors ---- 44

CORPORATE CULTURE

Customer Satisfaction ---- 45
Customer Happiness ---- 46
Employee Satisfaction ---- 47
Employee Happiness ---- 48
Partial Cooperative Clients ---- 49



COMPANY PROFILE

Shandong Weiterui Industrial Technology Co., Ltd., was founded in 2015 in Qingdao city, Shandong province,China.

We are not only manufacturer of low frequency and medium frequency induction heaters under our brand name WTR®, but also provider of reasonable solutions and comprehensive services.

CORPORATE CULTURE

Mission

While fostering the holistic well-being and professional fulfillment of our team, we empower our clients through advanced induction heating technology and contribute to the sustainable growth of national industry.

Vision

To set the global benchmark as the premier brand in industrial induction heating technology.

Values

Customer Centricity,Shared Value,Passion for Excellence,Continuous Innovation,Simplicity & Efficiency.

Information is subject to change without notice.

QUALIFICATIONS AND CERTIFICATES





- ISO9001



- ISO14001



- National Sales Leader for Three ConsecutiveYears of Bearing Heater



- Leading Brand in Medi-um-Frequency Induction HeatingEquipment for Thermal Assembly and Disassembly



- ISO45001



- Leading Unit of Chinese Bearing Heater Technical Specification Group Standard

The product has passed multiple certifications such as IS09001,CE,Demagnetization Test, etc. Authentic patents certified by Authoritative Institutions with more confidence.

WTR INDUCTION HEATERS
Mounting&Dismounting

Why use induction heating?

Induction heating is a superior, fast and controlled heating method. It is a safe and environmentally-friendly alternative to traditional heating methods such as ovens, oil baths or blow torches. These methods generate smoke, fumes or oil waste and are hazardous for your personal safety and a healthy working environment.

It is common knowledge that a correct mounting method extends the bearing life. Controlled stress-free heating prevents unnecessary damage, while retaining the original bearing lubrication. Ideal for sealed bearings(2RS-ZZ).Bearing manufacturers recommend controlled induction heating as the best practice for bearing mounting.

Multifunctional, for mounting and dismounting

We offer solutions for Mounting (low-frequency) and Dismounting (medium-frequency).For bearings,gear wheels.bushings, couplings, etc.

Controlled heating temperature and/or time

Smart electronics ensure optimum control during the heating-process. These automatically regulate the most efficient use of power and ensure even and rapid heating. No extra steps are necessary. Explosive heating is impossible (no discolouration or pitting of material).

Demagnetization


Reliable demagnetization is very important for bearings and transmission parts. The proven quality of WTR induction heaters guarantees maximum demagnetization (<2A/cm). This has a major impact on the service life of for instance bearings and gear wheels.

Energy efficient

All WTR induction heaters are energy efficient in comparison with traditional methods.

Operating principle

The heater works by inducing a (low-frequency) current in the workpiece to be heated. This is achieved by incorporating the workpiece as a secondary winding in a transformer. The primary winding is connected to the mains power by means of an electronic control. The magnetic field induces a high current (short-circuit current) through the workpiece, which consequently becomes hot. The workpiece is automatically demagnetized after each heating cycle.



Difference between low-frequency and medium-frequency

- Low-frequency: slow heating, great heat penetration depth
- Medium-frequency: fast heating, shallow heat penetration depth

Heating times are subject to the relationship between:

- Dimensions and weight
- Temperature and material
- Available power

WTR design

WTR develops, manufactures and sells WTR induction heaters for professional use in industry and industrial services. Our induction heaters are used around the world, are reliable and user friendly.

WEITERUI 维特瑞



Advantages of WTR induction heaters

- Safety for the user and the workpiece to be heated
- For mounting and dismounting
- Environmentally friendly: no smoke, no open flames, no fumes, no oil waste
- The energy saving alternative to traditional methods
- Robust design for use in industrial environments
- For sealed (2RS-zz) and pre-lubricated bearings
- Automatic power reduction
- Automatic demagnetization to <2A/cm
- Automatic reheat mode
- User-friendly swivel arm construction
- Designed for MRO and OEM departments
- 1-year warranty on electronic unit

Custom made

WTR has realised many projects aimed at optimising production processes and increasing production capacity. For serial heating or heating of non-standard shapes.



All heaters are supplied with:


- Instruction manual
- Heat-resistant gloves 250°C/482°F
- Magnetic temperature probe
- Vaseline for maintenance

Dependable quality

WTR induction heaters are proven to be reliable.Their sturdy styling and user-friendly design guarantee suninterrupted,problem-free operation in an industrial environment.

Service & Warranty

Our expertise and experience ensure quality, reliability, professional advice and outstanding service. WTR induction heaters are supplied with clear instructions and a 1-year warranty on the electronic components.







ELECTRIC HOT PLATE

WTR-EHP 300 Electrical Hot Plate



300mm×400mm
Heating Area

220V-230V/50~60HZ/1.2KW
Power

Ambient~200°C
Temperature Control Range

Advantages:

- For heating small bearings,gears,etc. in batches
- 6Kgs,portable to move around
- Accessories: 2pcs of gloves,1pc of handheld thermometer





INSTALLATION TOOLS

WTR-FT 36 Bearing Fitting Tool Kits



WTR-FT 36

- With 3 sleeves
- With 33 collets

Features:

- For installation of small parts
- Parts bore size range:10-55mm
- Material: HIPS(strong impacts,suitable for use under pressure)
- Including 36pcs of the components, 4Kg in weight





LOW FREQUENCY INDUTION HEATERS

WTR-T 2.5 Cone Heater



Features:

- Easy to use, just switch
- Lightweight making it easier to move around
- Reliable and flexible



Type	WTR-T2.5
Power KVA	0.5-1KW, automatic
Power Range	50%-100%,automatic
Voltage	220V/230V
Amp Standard	2.2-5.0A,automatic
Frequency Hz	50-60
Temperature Control	0-180℃; K type sensor
Time Control	0-99min59seconds
Automatic Demagnetization	<2A/cm
Bore Size Range	20-120mm
Max. Outer Size	260mm
Heater Weight	3Kg

LOW FREQUENCY INDUTION HEATERS


WTR-SIH Series- Bench Top



WTR-SIH 2.2



WTR-SIH 2.5

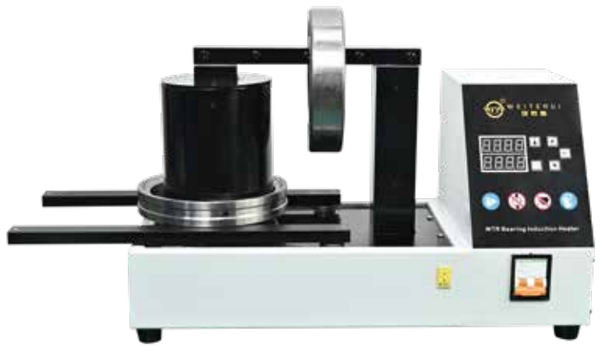

WTR-SIH 3.6 & WTR-SIH 5.0



WTR-SIH 8.0

LOW FREQUENCY INDUTION HEATERS

WTR-SIH 2.2



20
min. ID Φ mm

400
max. OD Φ mm

160
max. width mm

30
max. bearing weight kg

WTR-SIH 2.2

- Portable induction heater
- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Single phase (1 live wire, 1 neutral wire,1 ground wire)

Type	WTR-SIH 2.2
Power KVA	2.2
Voltage/Amp Standard	220V-230V/13A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	30kg
4 yokes included	(14x14x265,20x20x265,28x28x265,45x45x265) (mm) only request

WEITERUI 维特瑞
Mounting

LOW FREQUENCY INDUTION HEATERS

WTR-SIH 2.5



15
min. ID Φ mm

220
max. OD Φ mm

100
max. width mm

12
max. bearing weight kg


WTR-SIH 2.5

- Portable induction heater
- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Single phase (1 live wire, 1 neutral wire, 1ground wire)

Type	WTR-SIH 2.5
Power KVA	2.5
Voltage/Amp Standard	220V-230V/10A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	240/464
Max. Time Range	0-99min59sec
Temperature Hold	No
Automatic Demagnetization	<2A/cm
Weight In kg	20kg
5 yokes included	(10x10x150,14x14x150,20x20x150,30x30x150,40x40x150) (mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-SIH 3.6

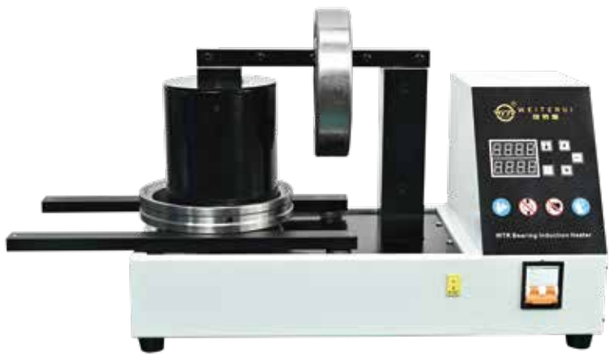

20/140
min. ID Φ mm

480
max. OD Φ mm

175
max. width mm

50
max. bearing weight kg

WTR-SIH 3.6


- Portable induction heater
- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Single phase (1 live wire, 1 neutral wire, 1 ground wire)

Type	WTR-SIH 3.6
Power KVA	3.6
Voltage/Amp Standard	220V-230V/16A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	30kg
4 yokes included	(14x14x265,20x20x265,28x28x265,45x45x265) (mm) only request

WEITERUI 维特瑞
Mounting

LOW FREQUENCY INDUTION HEATERS

WTR-SIH 5.0

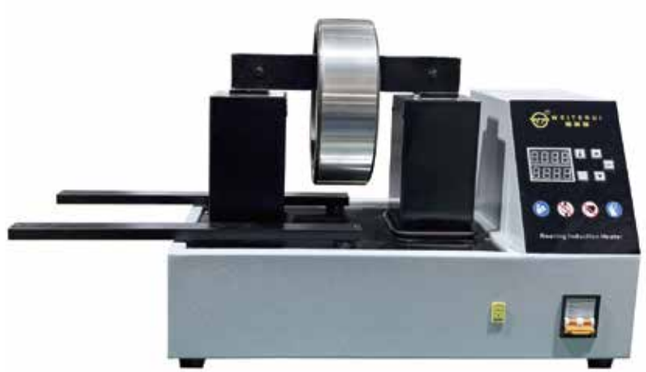

20/150
min. ID Φ mm

450
max. OD Φ mm

160
max. width mm

90
max. bearing weight kg

WTR-SIH 5.0

- Portable induction heater
- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Single phase (1 live wire, 1 neutral wire, 1 ground wire)

Type	WTR-SIH 5.0
Power KVA	5.0
Voltage/Amp Standard	220V-230V/23A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	40kg
4 yokes included	(14x14x295,20x20x295,28x28x295,45x45x295) (mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-SIH 8.0



60/170
min. ID Φ mm

530
max. OD Φ mm

200
max. width mm

100
max. bearing weight kg

WTR-SIH 8.0

- Portable induction heater
- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Two phases(2 live wires, 1 ground wire)

Type	WTR-SIH 8.0
Power KVA	8.0
Voltage/Amp Standard	380V-400V/21A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	65kg
2 yokes included	(40x40x390,55x55x535)(mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-MIH Series - Moveable Trolley



WTR-MIH 500



WTR-MIH 1200



WTR-MIH 1600



LOW FREQUENCY INDUTION HEATERS

WTR-MIH 500



20/150
min. ID Φ mm

450
max. OD Φ mm

160
max. width mm

65
max. bearing weight kg

WTR-MIH 500

- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Single phase (1 live wire, 1 neutral wire, 1 ground wire)

Type	WTR-MIH 500
Power KVA	5
Voltage/Amp Standard	220V-230V/23A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	71kg
4 yokes included	(14x14x295,20x20x295,28x28x295,45×45×295) (mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-MIH 1200



40/170
min. ID Φ mm

530
max. OD Φ mm

200
max. width mm

150
max. bearing weight kg

WTR-MIH 1200

- Temperature and time measurement
- Digital dispaly
- Ideal for use in workshops or on-site
- Two phases (2 live wires,1 ground wire)

Type	WTR-MIH 1200
Power KVA	12
Voltage/Amp Standard	380V-400V/32A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	90kg
3 yokes included	(28x28x390,40x40x390,55x55×535)(mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-MIH 1600



80/200
min. ID Φ mm

700
max. OD Φ mm

280
max. width mm

290
max. bearing weight kg

WTR-MIH 1600

- Temperature and time measurement
- Digital display
- Ideal for use in workshops or on-site
- Two phases (2 live wires,1 ground wire)
- The design is ergonomic

Type	WTR-MIH 1600
Power KVA	16
Voltage/Amp Standard	380V-400V/42A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	160kg
1 yoke included	(55x55x650mm) only request

LOW FREQUENCY INDUTION HEATERS

WTR-BV200-3



80/210
min. ID Φ mm

720
max. OD Φ mm

280
max. width mm

400
max. bearing weight kg

WTR-BV200-3

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 400kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Electric control cabinet and heating host structure is integrated
- Two phases (2 live wires,1 ground wire)

Type	WTR-BV200-3
Power KVA	20
Voltage/Amp Standard	380V-400V/52A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	200kg
1 yoke included	（55x55x650mm） only request

LOW FREQUENCY INDUTION HEATERS

WTR-LIH SERIES





WTR-LIH SERIES
16kva/25kva/35kva/50kva/65kva/Customized



WTR-LIH series with crane



WTR-LIH series with crane

LOW FREQUENCY INDUTION HEATERS

WTR-LIH 1600



80
min. ID Φ mm

700
max. OD Φ mm

280
max. width mm

400
max. bearing weight kg

WTR-LIH 1600

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 400kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Optional: electric crane
- Electric control cabinet and heating host structure: integrated or split, optional
- The LIH effect only works when the workpiece is in a horizontal position
- Two phases (2 live wires,1 ground wire)

Type	WTR-LIH 1600
Power KVA	16
Voltage/Amp Standard	380V-400V/42A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	180kg
1 yoke included	55x55x600mm only request



Optional Crane

LOW FREQUENCY INDUTION HEATERS

WTR-LIH 2500



80
min. ID Φ mm

800
max. OD Φ mm

250
max. width mm

500
max. bearing weight kg

WTR-LIH 2500

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 500kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Optional: electric crane
- Electric control cabinet and heating host structure: integrated or split, optional
- The LIH effect only works when the workpiece is in a horizontal position
- Two phases (2 live wires,1 ground wire)

Type	WTR-LIH 2500
Power KVA	25
Voltage/Amp Standard	380V-400V/66A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	280kg
2 yokes included	(50x60x500,60x75x500) (mm) only request



Optional Crane

LOW FREQUENCY INDUTION HEATERS

WTR-LIH 3500



100
min. ID Φ mm

900
max. OD Φ mm

300
max. width mm

700
max. bearing weight kg

WTR-LIH 3500

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 700kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Optional: electric crane
- Electric control cabinet and heating host structure: integrated or split, optional
- The LIH effect only works when the workpiece is in a horizontal position
- Two phases (2 live wires,1 ground wire)

Type	WTR-LIH 3500
Power KVA	35
Voltage/Amp Standard	380V-400V/92A
Frequency Hz	50-60
Temperature Control	Yes
Time Control	Yes
Max. Temperature ℃/ ℉	300/572
Max. Time Range	0-9999sec
Temperature Hold	Yes
Automatic Demagnetization	<2A/cm
Weight In kg	400kg
2 yokes included	(65x65x600,80x80x600) (mm) only request



Optional Crane

LOW FREQUENCY INDUTION HEATERS

WTR-LIH 5000



120
min. ID Φ mm

1000
max. OD Φ mm

300
max. width mm

1000
max. bearing weight kg

WTR-LIH 5000

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 1000kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Including 2 yokes, （80×80×680,100×100×680)(mm)only request
- Optional: electric crane
- Two phases (2 live wires,1 ground wire)

- The LIH effect only works when the workpiece is in a horizontal position
- High output,energy efficient



LOW FREQUENCY INDUTION HEATERS

WTR-LIH 6500



160
min. ID Φ mm

1200
max. OD Φ mm

300
max. width mm

1200
max. bearing weight kg

WTR-LIH 6500

- Heavy-duty heaters for special applications, in maintenance and production
- Heating capacity up to 1200kg
- Touch screen with clear graph
- Acoustic signal at the end of each heating cycle
- Including magnetic sensor up to 300°C (The usual temperature is recommended not to exceed 150°C)
- Including 1 yoke, （110×110×740mm)only request
- Optional: electric crane
- Two phases (2 live wires,1 ground wire)

- The LIH effect only works when the workpiece is in a horizontal position
- High output,energy efficient



LOW FREQUENCY INDUTION HEATERS

WTR-LIH WP Series



CUSTOMIZED MODEL

220-2000
min. ID Φ mm

3000
max. OD Φ mm

780
max. width mm

7000
max. bearing weight kg

WTR-LIH WP SERIES

A unique and flexible solution for oversized bearings and workpieces
The WTR-LIH WP combined induction heater is an energy-efficient, customer-specific heating solution.
Compared to other heating methods, this product can significantly reduce the heating time.

The LIH WP series is similar to the standard LIH product series, with the following key differences and additional benefits:

- Flexible design, including multiple heating cores and heating coils, controlled by a separate control panel and electric control cabinet
- It is suitable for heating large and thin workpieces such as slewing supports and railway hubs
- Depending on the application, workpieces weighing several tons can be heated
- Achieve a more uniform temperature gradient across the entire circumference. This is especially important for workpieces that are sensitive to uneven induction heating
- Unique design for fast and economical customized solutions

WEITERUI 维特瑞
Mounting

LOW FREQUENCY INDUTION HEATERS

WTR-LIH WP Series





Meet the assembly requirements of bearings, bearing sleeves, and bearing seats for the windpower industry with a capacity of 2.5MW, 3.0MW, 4.5MW, 5MW, 6MW, 9MW, 14MW and above,A device can meet the heating needs of multiple workpieces.

TECHNICAL SPECIFICATIONS

Portable Type



MODEL		WTR-SIH2.2	WTR-SIH2.5	WTR-SIH3.6	WTR-SIH5.0	WTR-SIH8.0
Power/kVA		2.2	2.5	3.5	5	8
Current/A		10A	10A	16A	23A	21A
Voltage		-	220v	220v	220v	380v
Frequency/Hz		50/60	50/60	50/60	50/60	50/60
Accessories	Iron Yokes /mm	14x14x265	10x10x150	14x14x265	14x14x295	40x40x390
Accessories	Iron Yokes /mm	20x20x265	14x14x150	20x20x265	20x20x295	55x55x535
Accessories	Iron Yokes /mm	45x45x265	20x20x150	28x28x265	28x28x295	-
Accessories	Iron Yokes /mm	-	30x30x150	45x45x265	45x45x295	-
Accessories	Iron Yokes /mm	-	40x40x150	-	-	-
Accessories	Swival Arm	-	-	-	-	Yes
Accessories	Iron Yokes Quantity / pc	3	5	4	4	2
Accessories	Iron Yokes (kg) approx.	4	5	7	8	16
Accessories)	Heat-resistant Gloves/pc	2	2	2	2	2
Accessories	Power Cable lengths/m	1.5	3	1.5	1.5	2.5
Accessories	Plug	16A, Three-pin plug, 220V			Aviation plug	Without
Max. Bearings Weight Kgs		30	12	50	65	100
Min. ID Φ mm, Vertical/Horizontal		120/145	15/60	20/140	20/150	60/170
Max. OD Φ mm, Vertical/Horizontal		360/400	220/200	360/400	400/450	480/530
Max. Width Φ mm, Vertical/Horizontal		115/160	70/100	115/160	145/160	200/200
Support for Horizontal Heating		Yes	Yes	Yes	Yes	Yes
Pole Area/mm		50x50	40x40	50x50	50x50	75x65
Pole Height/mm		165	100	165	165	200
Pole Distance/mm		120	70	120	145	210
Display		Digital	Digital	Digital	Digital	Digital
Magnetic Probe/Pc	K type	1	1	1	1	1
Temperature Control	Yes	0-300℃	0-240℃	0-300℃	0-300℃	0-300℃
Time Control	Yes	0-9999sec	0-9999sec	0-9999sec	0-9999sec	0-9999sec
Acoustic Signal At The End Of Each Heating Cycle		Yes	Yes	Yes	Yes	Yes
Temperature Hold		Optional	Optional	Optional	Optional	Optional
Automatic Power Reduction		Optional	Optional	Optional	Optional	Optional
Aut. Demagnetization,＜2A/CM		Yes	Yes	Yes	Yes	Yes
Heater Dimension (mm)		400x360x310	240x200x235	515x300x285	560x320x300	605x430x450
Heater Weight (Kg) approx. excl. yokes		30	20	30	37.4	65
Electric Crane For Yokes		-	-	-	-	-
Package	Type	-	-	-	-	-
Package	Size(mm) approx.	450x400x400	430x340x380	600x380x420	640x420x480	725x480x660
Package	G.W.(Kg)	-	22	46.5	45.4	96
Mobile		-	-	-	-	Optional

WEITERUI 维特瑞
Mounting

TECHNICAL SPECIFICATIONS

Movable Type



MODEL		WTR-MIH500	WTR-MIH1200	WTR-MIH1600
Power/kVA		5	12	16
Current/A		23A	32A	42A
Voltage		220v	380V	380V
Frequency/Hz		50/60	50/60	50/60
Accessories	Iron Yokes /mm	14x14x295	28x28x390	55x55x650
Accessories	Iron Yokes /mm	20x20x295	40x40x390	-
Accessories	Iron Yokes /mm	28x28x295	55x55x535	-
Accessories	Iron Yokes /mm	45x45x295	-	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Swival Arm	-	Yes	Yes
Accessories	Iron Yokes Quantity / pc	4	3	-
Accessories	Iron Yokes (kg) approx.	7.5	17.5	13
Accessories)	Heat-resistant Gloves/pc	2	2	2
Accessories	Power Cable lengths/m	1.5	2.5	2.5
Accessories	Plug	Without	Without	Without
Max. Bearings Weight Kgs		65	150	300
Min. ID Φ mm, Vertical/Horizontal		20/150	40/170	80/200
Max. OD Φ mm, Vertical/Horizontal		400/450	450/530	550/700
Max. Width Φ mm, Vertical/Horizontal		145/160	200/200	280
Support for Horizontal Heating		Yes	Yes	Yes
Pole Area/mm		50x50	75x65	75x85
Pole Height/mm		165	200	290
Pole Distance/mm		145	210	290
Display		Digital	Digital	Digital
Magnetic Probe/Pc	K type	1	1	1
Temperature Control	Yes	0-300℃	0-300℃	0-300℃
Time Control	Yes	0-9999sec	0-9999sec	0-9999sec
Acoustic Signal At The End Of Each Heating Cycle		Yes	Yes	Yes
Temperature Hold		Optional	Optional	Optional
Automatic Power Reduction		Optional	Optional	Optional
Aut. Demagnetization,＜2A/CM		Yes	Yes	Yes
Heater Dimension (mm)		670x840x390	930x370x700	1020x600x1050
Heater Weight (Kg) approx. excl. yokes		71	90	160
Electric Crane For Yokes		-	-	-
Package	Type	-	Plywood Crates	Plywood Crates
Package	Size(mm) approx.	800x430x980	1000x430x730	1000x430x730
Package	G.W.(Kg)	78.5	156	156
Mobile		Yes	Yes	Yes

TECHNICAL SPECIFICATIONS

All In One Type(Vertical) & Large Size Type (Horizontal)



MODEL		WTR-BV200-3	WTR-LIH1600	WTR-LIH2500
Power/kVA		20	16	25
Current/A		52A	42A	66A
Voltage		380V	380V	380V
Frequency/Hz		50/60	50/60	50/60
Accessories	Iron Yokes /mm	650x55x55	55x55x600	500x60x50
Accessories	Iron Yokes /mm	-	-	500x75x60
Accessories	Iron Yokes /mm	-	-	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Swival Arm	Yes	-	-
Accessories	Iron Yokes Quantity / pc	1	1	2
Accessories	Iron Yokes (kg) approx.	13	12	27
Accessories)	Heat-resistant Gloves/pc	2	2	2
Accessories	Power Cable lengths/m	3	2.5	3
Accessories	Plug	Without	Without	Without
Max. Bearings Weight Kgs		400	400	500
Min. ID Φ mm, Vertical/Horizontal		80/210	80	80
Max. OD Φ mm, Vertical/Horizontal		550/720	700	800
Max. Width Φ mm, Vertical/Horizontal		280	280	250
Support for Horizontal Heating		Yes	No	No
Pole Area/mm		85x75	75x85	105x80
Pole Height/mm		290	-	-
Pole Distance/mm		290	-	-
Display		Digital	Digital	Digital
Magnetic Probe/Pc	K type	1	1	1
Temperature Control	Yes	0-300℃	0-300℃	0-300℃
Time Control	Yes	0-9999sec	0-9999sec	0-9999sec
Acoustic Signal At The End Of Each Heating Cycle		Yes	Yes	Yes
Temperature Hold		Optional	Optional	Optional
Automatic Power Reduction		Optional	Optional	Optional
Aut. Demagnetization,＜2A/CM		Yes	Yes	Yes
Heater Dimension (mm)		1400x425x910	950x490x760	950x540x750
Heater Weight (Kg) approx. excl. yokes		200	180	280
Electric Crane For Yokes		-	Optional	Optional
Package	Type	Plywood Crates	Plywood Crates	Plywood Crates
Package	Size(mm) approx.	1450x500x950	1000x550x800	1000x600x800
Package	G.W.(Kg)	250	230	330
Mobile		Yes	Yes	Yes

TECHNICAL SPECIFICATIONS

Large Size Type (Horizontal)



MODEL		WTR-LIH3500	WTR-LIH5000	WTR-LIH6500
Power/kVA		35	50	65
Current/A		92A	132A	170A
Voltage		380V	380V	380V
Frequency/Hz		50/60	50/60	50/60
Accessories	Iron Yokes /mm	600x65x65	680x80x80	110x110x740
Accessories	Iron Yokes /mm	600x80x80	680x100x100	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Iron Yokes /mm	-	-	-
Accessories	Swival Arm	-	-	-
Accessories	Iron Yokes Quantity / pc	2	2	1
Accessories	Iron Yokes (kg) approx.	35	50	65
Accessories)	Heat-resistant Gloves/pc	2	2	2
Accessories	Power Cable lengths/m	3	3	3
Accessories	Plug	Without	Without	Without
Max. Bearings Weight Kgs		700	1000	1200
Min. ID Φ mm, Vertical/Horizontal		100	120	160
Max. OD Φ mm, Vertical/Horizontal		900	1000	1200
Max. Width Φ mm, Vertical/Horizontal		300	300	300
Support for Horizontal Heating		No	No	No
Pole Area/mm		100x100	115x115	130x120
Pole Height/mm		-	-	-
Pole Distance/mm		-	-	-
Display		Touch	Touch	Touch
Magnetic Probe/Pc	K type	1	1	1
Temperature Control	Yes	0-300℃	0-300℃	0-300℃
Time Control	Yes	0-9999sec	0-9999sec	0-9999sec
Acoustic Signal At The End Of Each Heating Cycle		Yes	Yes	Yes
Temperature Hold		Optional	Optional	Optional
Automatic Power Reduction		Optional	Optional	Optional
Aut. Demagnetization,＜2A/CM		Yes	Yes	Yes
Heater Dimension (mm)		950x700x950	1800x840x1050 Cabinet:600×450×1000	2050×850×1100 Cabinet:600×450×1000
Heater Weight (Kg) approx. excl. yokes		400	600	750
Electric Crane For Yokes		Optional	Optional	Optional
Package	Type	Plywood Crates	Plywood Crates	Plywood Crates
Package	Size(mm) approx.	1000x750x1000	1850x850x1100	2100x900x1150
Package	G.W.(Kg)	450	650	800
Mobile		Yes	Yes	Yes

LOW FREQUENCY INDUTION HEATERS

WTR-C Series



WTR-C-1



WTR-C-2

- Safe and easy removal within just 2 minutes

PRODUCT PARAMETERS

- Wide application - WTR-C inductors could be used for mounting or dismounting of the bearing inner ring, labyrinth ring, fixed distance ring.
- Perfect fit - WTR-C inductors are specifically designed for a given inner ring to achieve optimum dismounting performance and safe operation.
- Mobile lifting device is optional, more convenient to handle and operate.

WTR-C Series

The fixed size induction heaters are designed to safely and easily dismount, and mount, cylindrical roller bearing inner rings, which are often mounted with a very tight interference fit. WTR-C series solution consists of different inductors that are fitted for the application and connected to a matching control cabinet to power and operate the inductor.

WEITERUI 维特瑞
Mounting & Dismounting

PRODUCT PARAMETERS

WTR-C Series

Bearing	Inner Sleeve Size	Frequency	Voltage	Current	Heating Time		Temperature
Models	OD x W	(HZ)		(A)	Mount	Dismount	℃
FC3045120	ϕ169×120	50	380V	100	100”	120”	120
FC3248124	ϕ183×124	50	380V	100	100”	120”	120
FC3652168	ϕ202×168	50	380V	100	100”	120”	120
FC3852168	ϕ212×168	50	380V	100	100”	120”	120
FC4058192	ϕ226×192	50	380V	100	110”	120”	120
FC4462192	ϕ246×192	50	380V	100	110”	120”	120
FC4666206	ϕ260×206	50	380V	120	120”	130”	120
FC5274220	ϕ292×220	50	380V	130	120”	130”	120
FC5678220	ϕ312×220	50	380V	130	120”	130”	120
FC6084240	ϕ332×240	50	380V	140	120”	130”	120
FC6490240	ϕ355×240	50	380V	140	120”	130”	120
FC6890250	ϕ371×250	50	380V	140	120”	130”	120
FCD6896350	ϕ378×175	50	380V	140	120”	130”	120
FCDP130180650	ϕ704×325	50	380V	170	15’	16’	130
FCDP146206750	ϕ809×375	50	380V	180	15’	20’	130
FCDP160216700	ϕ878×350	50	380V	180	22’	25’	130

! Heating time in the form is approximation tested under 28℃,users need to do adjustment according to the Room temperature.

INDUCTION HEATERS

WTR MF Quick-Heaters - medium-frequency technology

Mounting, dismounting and preheating of metal components

Fast and/or controlled heating with AT

Thanks to medlum-frequency technology, energy is transferred to the workplece effectively,so it is heated easily and quickly. The WTR MF Quick-Heater consists of a generator with afixed or flexible inductor. Its compact dimensions make It easy to move.

WTR MF Quick-Heaters result in time savings as they can be deployed very rapidly (feweractions) and heat faster than conven-tional methods. Energy use is much more efficientthanks to its lower power consumption. One of the major advantages of this type ofinduction heater is that they are not limited to components with a cylindrical shape: flexibleinductors can be wound around any size or shape.

Advantages of WTR MF Quick-Heaters

- ✔ For mounting, dismounting and preheating
- ✔ Suitable for steel, cast iron, stainless steel and titanium
- ✔ Temperature and/or time controlled heating
- ✔ Double temperature measurement (AT monitoring)
- ✔ Low connection power (32/63 Amp)
- ✔ Generators are adjustable from 2.5 to 22/44 kW
- ✔ Easy to use and flexible
- ✔ Suitable for production and maintenance applications
- ✔ No residual magnetism
- ✔ No fire hazard due to open filames
- ✔ No noise, fumes or smoke nuisance
- ✔ Air-cooled: no water cooling needed
- ✔ Because the work is carrled out damage-free, expensive components can be reused

To be used for

- For Bearings
- Labyrinth seals
- Bearing rings
- Bearing housings
- Gear wheels
- Rollers
- Tubes
- Bushings
- Couplings
- Train wheels/train wheel tyres
- TExtruders
- Stator housings


The WTR MF Quick-Heater

This heater consists of a generator andone or more inductors. The generatoris designed for the connection ofinductors used for heating ferromagneticworkpleces. Suitable materlals includeiron, steel, stainless steel, titanium andcertain bronze alloys. The maxlmumcapacity workpleces can be subjectedto Is 22 kW or 44 kW, depending on thetype of heater.

The WTR MF Quick-Heater

The three-phase voltage is rectiffiedand smoothed. This rectified voltage Isthen converted by means of an inverterinto an AC voltage with a frequencybetween 10 and 25 kHz. The poweris then applied to the workplecemagneti-cally via a 'resonance capaci-tor'using an inductor (coll).

Since the frequency is relatively high, thepenetration depth of the magnetic field isnot too large, so that only the outer layerof the workplece is heated. This principlemakes heating using medlum-frequencypartic-ularly suitable for dismantling-purposes, such as removing bearing ringsfrom shafts.

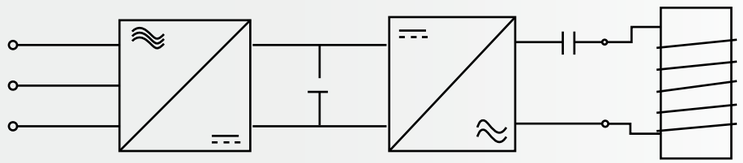

MEDIUM FREQUENCY INDUCTION HEATERS

WTR MF Heaters - Medium-Frequency





To be used for:
Bearings
Labyrinth seals
Bearing rings
Bearing housings
Gear wheels
Rollers
Tubes
Bushings
Couplings
Train wheels/train wheel tyres
Stator housings



Advantages of WTR MF Quick-Heaters:

- ✔ For mounting, dismounting and preheating
- ✔ Suitable for steel, cast iron, stainless steel and titanium
- ✔ Full digital precision control: IGBT+DSP
- ✔ Full air-cooled: no water cooling needed
- ✔ Strong adaptability: the output frequency can be automatically adjusted with the load from 5 to 25KHz
- ✔ Efficient protection: IGBT nanosecond protection
- ✔ Fast start-up, start-up success rate of nearly 100%
- ✔ Multiple closed-loop mode: Constant current/Constant power/Constant temperature,multiple closed-loop to meet the needs of various occasions
- ✔ Multiple operation modes: Temperature mode/Time mode/Process mode; PID temperature control system; Over-temperature alarm,Du-al-channel temperature measurement temperature difference alarm
- ✔ Powerful communication function and comfortable ergonomics interface
- ✔ Generators are supporable from 5 to 200 kW
- ✔ Suitable for production and maintenance applications

MEDIUM FREQUENCY INDUCTION HEATERS

WTR-MF5-BE Series



5
power kw

5''
display inch

220/230
Voltage V



WTR-MF5-BE

- Compact design with 5''
- User-friendly touchscreen
- Smart electronics ensure optimum operating frequency
- Adjustable power regulation
- Choice between fixed and flexible inductors
- Full digital precision control: IGBT+DSP inductors





WEITERUI 维特瑞
Mounting & Dismounting

MEDIUM FREQUENCY INDUCTION HEATERS

WTR-MF Series



10/20/30/40/60
power kw

7''
display inch

380V±10% or other customized

WTR-MF10-BE/WTR-MF20-BE/WTR-MF30-BE/WTR-MF 40-BE

- Compact design with 7'' display
- User-friendly touchscreen operation
- Smart electronics ensure optimum operating frequency
- Adjustable power regulation
- Double temperature measurement
- Choice between fixed and flexible inductors-measurement
- Full digital precision control: IGBT+DSP
- Three phases (3 live wires, 1 neutral wire, 1 ground wire)



Can heat according to preset temperature/time curve
The heating process is displayed in a clear graph
Log function to save data or export it via a USB port





MEDIUM FREQUENCY INDUCTION HEATERS

WTR-MF Series



60/ 80/100/120/160/200
power kw

10''
display inch

380V±10% or other customized

WTR-MF60-BE/WTR-MF80-BE/WTR-MF100-BE/ WTR-MF120-BE

- Compact design with 10'' display
- User-friendly touchscreen operation
- Smart electronics ensure optimum operating frequency
- Adjustable power regulation
- Double temperature measurement
- Choice between fixed and flexible inductors
- Full digital precision control: IGBT+DSP
- Three phases (3 live wires, 1 neutral wire, 1 ground wire)



Can heat according to preset temperature/-time curve.
The heating process is displayed in a clear graph.
Log function to save data or export it via a USB port.

WEITERUI 维特瑞
Mounting & Dismounting

TECHNICAL SPECIFICATIONS

Shrink Fitting & Removal & PWHT





MODEL	WTR-MF5-BE	WTR-MF10-BE
Forced air cooling	Yes	Yes
Rated power	5kW	10KW
Adjustable power range	1-5KW	1-10KW
Operating frequency	5-35kHz	5-35kHz
Input voltage	220V±5%	380V±5%
Frequency	50/60Hz	50/60Hz
Number of phases	1	3
Input current	22A	15A
Power supply duty cycle	100%	100%
Conversion efficiency	30-95%	30-95%
Temperature measurement	K or Probe type,5meters	K or Probe type,5meters
Accuracy	±1℃	±1℃
Inductor recognition	No	No
Temperature control	0-400℃	0-400℃
Sensor quantity / pc	1	1
Time control	0-65000S	0-65000S
Trolley	Portable	Portable
Generator dimension mm	510x240x230	580x263x220
Generator weight kg	11.4	18
Package dimension	600x380x400	700x350x350
Package weight kg	9	12
G.w. Kg	20.4	30
Dimension display	5''	5''
Heat curve in display	No	No
Setpoint power	Via touchscreen	Via touchscreen
Setpoint temperature	Via touchscreen	Via touchscreen
Setpoint temperature curve	Yes	Yes
Setpoint timer	Via touchscreen	Via touchscreen
Selection operating mode	Via touchscreen	Via touchscreen
Digital readings temperature	Setpoint and actual value on touchscreen	Setpoint and actual value on touchscreen
Digital readings power	Actual value on touchscreen	Actual value on touchscreen
Digital readings frequency	Actual value on touchscreen	Actual value on touchscreen
USB connection	No	No
Network connection	No	No
Heating log	No	No
Installation in operation state	Actual value on touchscreen	Actual value on touchscreen
Error message	Actual value on touchscreen	Actual value on touchscreen
End of heating cycle	Actual value on touchscreen	Actual value on touchscreen
Protection rate	IP20	
Working environment	'-10 to 45℃ (≥45℃, use at reduced capacity)	
Relative humidity	≤90%, and must not condense.	
Working altitude	≤1500m (>1500m, use at reduced capacity)	

TECHNICAL SPECIFICATIONS

Shrink Fitting & Removal & PWHT





MODEL	WTR-MF25-BE	WTR-MF40-BE
Forced air cooling	Yes	Yes
Rated power	25kW	40kW
Adjustable power range	2-25KW	2-40KW
Operating frequency	5-15kHz	5-15kHz
Input voltage	380V±5%	380V±5%
Frequency	50/60Hz	50/60Hz
Number of phases	3	3
Input current	38A	60A
Power supply duty cycle	100%	100%
Conversion efficiency	≥95%	≥95%
Temperature measurement	K or Probe type,5meters	K or Probe type,5meters
Accuracy	±1℃	±1℃
Inductor recognition	No	No
Temperature control	0-400℃	0-400℃
Sensor quantity / pc	2	2
Time control	0-65000S	0-65000S
Trolley	Optional	Optional
Generator dimension mm	870x360x540	1030x420x630
Generator weight kg	64	81.2
Package dimension	6970x500x750	1150x550x860
Package weight kg	26	30
G.w. Kg	90	111.2
Dimension display	7''	7''
Heat curve in display	Yes	Yes
Setpoint power	Via touchscreen	Via touchscreen
Setpoint temperature	Via touchscreen	Via touchscreen
Setpoint temperature curve	Yes	Yes
Setpoint timer	Via touchscreen	Via touchscreen
Selection operating mode	Via touchscreen	Via touchscreen
Digital readings temperature	Setpoint and actual value on touchscreen	Setpoint and actual value on touchscreen
Digital readings power	Actual value on touchscreen	Actual value on touchscreen
Digital readings frequency	Actual value on touchscreen	Actual value on touchscreen
USB connection	Yes	Yes
Network connection	Yes	Yes
Heating log	Yes	Yes
Installation in operation state	Green flash light	Green flash light
Error message	Light continuous light/acoustic signal	Light continuous light/acoustic signal
End of heating cycle	Green light stops flashing	Green light stops flashing
Protection rate	IP20	
Working environment	'-10 to 45℃ (≥45℃, use at reduced capacity)	
Relative humidity	≤90%, and must not condense.	
Working altitude	≤1500m (>1500m, use at reduced capacity)	

WEITERUI 维特瑞
Mounting & Dismounting

TECHNICAL SPECIFICATIONS

Shrink Fitting & Removal & PWHT





MODEL	WTR-MF25-BE	WTR-MF80-BE
Forced air cooling	Yes	Yes
Rated power	60kW	80kW
Adjustable power range	2-60KW	5-80KW
Operating frequency	5-15kHz	5-15kHz
Input voltage	380V±5%	380V±5%
Frequency	50/60Hz	50/60Hz
Number of phases	3	3
Input current	90A	120A
Power supply duty cycle	100%	100%
Conversion efficiency	≥95%	≥95%
Temperature measurement	K or Probe type,5meters	K or Probe type,5meters
Accuracy	±1℃	±1℃
Inductor recognition	No	No
Temperature control	0-400℃	0-400℃
Sensor quantity / pc	2	2
Time control	0-65000S	0-65000S
Trolley	Yes	Yes
Generator dimension mm	730x570x1350	730x570x1350
Generator weight kg	158	165
Package dimension	880x720x1600	880x720x1600
Package weight kg	40	40
G.w. Kg	198	205
Dimension display	10''	10''
Heat curve in display	Yes	Yes
Setpoint power	Via touchscreen	Via touchscreen
Setpoint temperature	Via touchscreen	Via touchscreen
Setpoint temperature curve	Yes	Yes
Setpoint timer	Via touchscreen	Via touchscreen
Selection operating mode	Via touchscreen	Via touchscreen
Digital readings temperature	Setpoint and actual value on touchscreen	Setpoint and actual value on touchscreen
Digital readings power	Actual value on touchscreen	Actual value on touchscreen
Digital readings frequency	Actual value on touchscreen	Actual value on touchscreen
USB connection	Yes	Yes
Network connection	Yes	Yes
Heating log	Yes	Yes
Installation in operation state	Green flash light	Green flash light
Error message	Light continuous light/acoustic signal	Light continuous light/acoustic signal
End of heating cycle	Green light stops flashing	Green light stops flashing
Protection rate	IP20	
Working environment	'-10 to 45℃ (≥45℃, use at reduced capacity)	
Relative humidity	≤90%, and must not condense.	
Working altitude	≤1500m (>1500m, use at reduced capacity)	

TECHNICAL SPECIFICATIONS

Shrink Fitting & Removal & PWHT





MODEL	WTR-MF120-BE	WTR-MF160-BE
Forced air cooling	Yes	Yes
Rated power	120kW	160kW
Adjustable power range	5-120KW	5-160KW
Operating frequency	5-15kHz	5-15kHz
Input voltage	380V±5%	380V±5%
Frequency	50/60Hz	50/60Hz
Number of phases	3	3
Input current	180A	240A
Power supply duty cycle	100%	100%
Conversion efficiency	≥95%	≥95%
Temperature measurement	K or Probe type,5meters	K or Probe type,5meters
Accuracy	±1℃	±1℃
Inductor recognition	No	No
Temperature control	0-400℃	0-400℃
Sensor quantity / pc	2	2
Time control	0-65000S	0-65000S
Trolley	Yes	Yes
Generator dimension mm	1100x590x1350	1200x650x1850
Generator weight kg	200	230
Package dimension	1040x720x1600	1380x750x2000
Package weight kg	43	50
G.w. Kg	243	280
Dimension display	10''	10''
Heat curve in display	Yes	Yes
Setpoint power	Via touchscreen	Via touchscreen
Setpoint temperature	Via touchscreen	Via touchscreen
Setpoint temperature curve	Yes	Yes
Setpoint timer	Via touchscreen	Via touchscreen
Selection operating mode	Via touchscreen	Via touchscreen
Digital readings temperature	Setpoint and actual value on touchscreen	Setpoint and actual value on touchscreen
Digital readings power	Actual value on touchscreen	Actual value on touchscreen
Digital readings frequency	Actual value on touchscreen	Actual value on touchscreen
USB connection	Yes	Yes
Network connection	Yes	Yes
Heating log	Yes	Yes
Installation in operation state	Green flash light	Green flash light
Error message	Light continuous light/acoustic signal	Light continuous light/acoustic signal
End of heating cycle	Green light stops flashing	Green light stops flashing
Protection rate	IP20	
Working environment	'-10 to 45℃ (≥45℃, use at reduced capacity)	
Relative humidity	≤90%, and must not condense.	
itude	≤1500m (>1500m, use at reduced capacity)	

WEITERUI 维特瑞
Mounting & Dismounting

Flexible Inductors

Flexible inductors are a multifunctional solution for various shapes or sizes. They can be used in or arounds workpiece.





Heating motor housing for dismounting

Fixed Inductors

Fixed inductors are used for serial work.





Heating bearing housing for mounting

Heating bearing inner&outer ring for mounting

• PARTIAL COOPERATIVE CLIENTS

NORDEX We've got the power.
Vestas
VOLVO
thyssenkrupp
ABB
Coca-Cola
TOYOTA
MITSUBISHI
SIEMENS
SEW EURODRIVE
adani
HITACHI Inspire the Next
BorgWarner
Bekaert
ZOOMLION
SMS group
Metso
vallourec
posco
Midea 美的
中国中车 CRRC
中国石化 SINOPEC
运达股份 WINDEY
南高齿 NGC

• CUSTOMER SATISFACTION



• CUSTOMER HAPPINESS

0 Score

Standard language, standard service, smile, and enthusiasm.

20 Score

1. Respect every customer and have a heart of awe.
2. Communicate with customers attentively, listen to their opinions first, do not argue with them, and make reasonable concessions.
3. Provide reasonable suggestions based on customer feedback.

50 Score

1. Proactively considering customers, professional and meticulous, able to create value for customers.
2. If there is a problem, come up with a solution as soon as possible.
3. Valuing every customer transaction, ensuring quality.

100 Score

1. Words must be followed by actions, and actions must be taken to provide customers with competitive products.
2. Prioritize customer needs and gain insight into them.
3. Service results received written recognition from customers or new customers.
4. Customers are willing to share their positive feelings on their social media and continue to collaborate.

WEITERUI 维特瑞

• EMPLOYEE SATISFACTION



WEITERUI 维特瑞

• EMPLOYEE HAPPINESS

0 Score

Reservoir-style operation: Timely and full payment of salaries, five social insurances and one housing fund, with salaries 10% higher than the industry average. Ensure living security, so that employees can enjoy care in old age and medical support when sick. Enable employees to obtain relatively satisfactory income and a sense of achievement, free from worries.

20 Score

Good working and dining environment; reasonable rules, regulations and processes; a complete employee happiness system. Let employees fall in love with their work, feel inner abundance, work happily, study diligently, and enhance the ability to improve, choose goodness, and strive for colleagues. Achieve growth every month.

50 Score

Help employees find the purpose and meaning of work, so that everyone can discover their own mission and value. Share a common corporate philosophy, take the company's mission and vision as common goals, dare to challenge ambitious targets, and enable everyone to become operators, experts in their positions and industries, trustworthy and respected partners, benchmarks of the enterprise and models of the industry. Become the pride of their families, and make progress every week.

100 Score

Each partner should have a sense of mission and altruism, always seek within, and work and live happily around the mission. Give without expectation, be truly grateful, and happiness will come naturally. All employees become mission propagators, continuously creating a magnetic field of love, sincerity and harmony, passing on love, influencing life with life, and making life more wonderful.

WEITERUI
维特瑞

WEITERUI
维特瑞

WEITERUI
维特瑞